



GoPower

- [Windows](#)
- [Linux](#)


# Windows




<https://github.com/helloxz/GoPower/releases>



GoPower " "



./GoPower.exe init



" " "

Init success.

- 1.
- 2. Windows



config.ini

[ servers ]  
port = : 886


RunMode = debug  
webui = off

[infos]  
key = xxxxxxxx


- port = :886 886
- RunMode = debug release
- webui = off WEBUI GoPower WEBUI
- key = xxxxxxxx




Windows Defender - - -




-

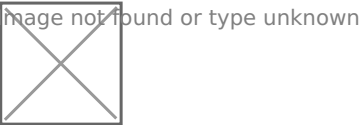

C 886 ver

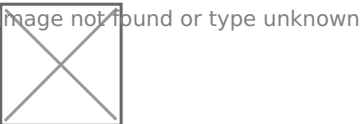

3

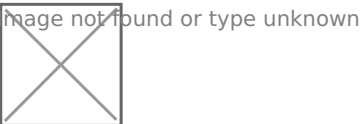

Win + services.msc GoPower

Image not found or type unknown



http://localhost:886/WEB

image not found or type unknown



# Linux



<https://github.com/helloxz/GoPower/releases>



GoPow root

```
#
chmod +x GoPower
#GoPower
./GoPower init
```



config.ini

```
[servers]
port = :886
RunMode = debug
webui = off

[infos]
key = xxxxxxxx
```

- port = :886886
- RunMode = debug release
- webui = offWEBUIGoPowerWEBUI
- key = xxxxxxxx



886 GoPower

```
#firewalld
firewall-cmd --zone=public --add-port=886/tcp --permanent
firewall-cmd --reload

#ufw
ufw allow 886
```

# GoPower

```
#
systemctl start gopower

#
systemctl stop gopower

#
systemctl restart gopower

#
systemctl status gopower

#
systemctl enable gopower
```



[http://localhost:886/](#)WEB

