







ImgURL ProBackblaze B2COSFTP

- 
- 
- Backblaze B2
- COS
- FTP
- 
- AWS S3



ImgURL Pro Backblaze B2 COS FTP

- -



- 
- Backblaze B2: B2
- COS
- FTP: FTP
- 10G 10G



FTP (/) /



img not found or type unknown

1. " "
2. " "



XXXXXXXXXXXXXXXXXXXX(0)XXCDNXXXX

img  
Image not found or type unknown

XXCDNXXXX

XXXXXXXXAXXXXXXXXAXXXXXXXXCDNXXXXXXXXXXXX

- 1. XXAXXXXXXB
- 2. XXXXXCDNXXXXCloudFlareXXXXBXXCDNXX
- 3. XXXXImgURLXX - XXXX - XXXX - XX - XXBXXXX

# Backblaze B2

## Backblaze

Backblaze <https://www.backblaze.com/> 100GB 5\$/



Backblaze B2

image not found or type unknown

Backblaze B2 API

Backblaze - App Keys

image not found or type unknown

KeyID "B2" imgurl "

image not found or type unknown

URL https://f002.backblazeb2.com/file/imgurl/imgs/2019/06/a91bf049

image not found or type unknown

<https://f002.backblazeb2.com/file/imgurl/> <KeyID> <URL>



config.php

- \$config['b2']['b2\_app\_key\_id']: KeyID
- \$config['b2']['b2\_app\_key']:
- \$config['b2']['b2\_bucket\_id']:

image not found or type unknown

# B2

ImgURL - - B2"URL"

image not found or type unknown

# CloudFlare CDN

B2CloudFlareCDNB2CloudFlare CDN



- /
- B2

# TENCENT COS

COS 腾讯云 Cloud Object Storage 腾讯云 COS

## TENCENT bucket

腾讯云 - 腾讯云 - 腾讯云“腾讯云”

img 腾讯云 not found or type unknown



腾讯云 https://console.cloud.tencent.com/cam/capi 腾讯云

img 腾讯云 not found or type unknown

腾讯云 <APPID><SecretId><SecretKey> 腾讯云

## TENCENT COS 腾讯云

腾讯云 https://cloud.tencent.com/document/product/436/6224

腾讯云 cos.ap-guangzhou.myqcloud.com”



config.php 腾讯云 COS 腾讯云

- \$config['cos']['app\_id']: 腾讯云 APPID
- \$config['cos']['access\_key\_id']: 腾讯云 SecretId
- \$config['cos']['access\_key\_secret']: 腾讯云 SecretKey
- \$config['cos']['host']: 腾讯云 cos.ap-guangzhou.myqcloud.com

# 腾讯云COS

imgURL - - - COS - COS

img not found or type unknown



- /
- `config.php` `bu-` `et`
- bucket bucket bucket
- bucket bucket

# FTP

FTP 连接 PHP 连接 imgURL Pro 连接 FTP

img not found or type unknown



FTP 连接 A 连接 B 连接

1. B 连接
2. B 连接 FTP 连接 B 连接
3. config.php 连接 FTP 连接
4. imgURL 连接 - 连接 - 连接 - FTP 连接 B 连接



config.php 连接 FTP 连接 FTP 连接

- \$config['ftp']['hostname']:FTP 连接 IP 连接
- \$config['ftp']['username']:FTP 连接
- \$config['ftp']['password']:FTP 连接

## FTP

imgURL 连接 - 连接 - 连接 - FTP 连接 FTP 连接

img not found or type unknown



pu /www/server/pure-ftp/etc/pure-ftp.conf



□□

TLS 0

□□□□ /etc/init.d/pure-ftpd restart

□□□□

- **FTP**□□□□□□□□□□/□
- □□□**docker**□□**FTP**



imgURL Pro v1.1



- -

img  
image not found or type unknown

- 
- 
- 



- - https://portal.qiniu.com/user/key AccessKey/SecretKey

img  
image not found or type unknown



config.php

- \$config['qiniu']['AccessKey']AccessKey
- \$config['qiniu']['SecretKey']SecretKey
- \$config['qiniu']['bucket']
- \$config['qiniu']['up\_host']https://developer.qiniu.com/kodo/manual/1671/region-en  
http://up-z2.qiniup.com

img  
image not found or type unknown



imgURL - - - -

img e not found or type unknown



- /
- bucket
- bucket

# AWS S3

2.0.0 搭建AWS S3 minio 搭建AWS S3

## config.php


config.php S3

```
$config['s3']['region'] = 'us-east-1';
$config['s3']['endpoint'] = 'http://minio.xxx.com:9000';
$config['s3']['key'] = 'xxx';
$config['s3']['secret'] = 'xxx';
$config['s3']['bucket'] = 'xxx';
```

- region
- endpointS3 http://xxx.com:9000
- key:minio
- bucket



- / S3 S3

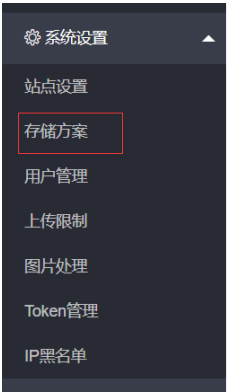

本地 Backblaze B2 FTP 腾讯COS 七牛云 S3

绑定域名 https://v.bmp.ovh/

权重 0

游客上传 ☐ 是 ☒ 否

开关 ☐

保存

S3 “ ” S3



AWS S3




```
[REDACTED] - config.php $config['s3']['bucket'] [REDACTED]
```



<https://developer.qiniu.com/kodo/4088/s3-access-domainname>

- `$config['s3']['region']` `cn-south-1`
- `$config['s3']['endpoint']` `Endpoint https / https://s3-cn-south-1.qiniucs.com`

<https://portal.qiniu.com/user/key> AccessKey/SecretKey

- `$config['s3']['key']` AccessKey
- `$config['s3']['bucket']` 



https://oss.console.aliyun.com/bucket - Bucket



config.php [S3]

```
$config['s3']['region'] = 'us-east-1';
$config['s3']['endpoint'] = 'http://minio.xxx.com:9000';
$config['s3']['key'] = 'xxx';
```

```
$config['s3']['secret'] = 'xxx';  
$config['s3']['bucket'] = 'xxx';
```

## 配置OSS Region和Endpoint

- region 配置Region ID
- endpoint http://buket. Endpoint http://bucket.oss-cn-hangzhou.aliyuncs.com
- bucket 配置Bucket名称

## 配置AccessKey ID和AccessKey Secret

- key 配置AccessKey ID
- secret 配置AccessKey Secret

配置完成


```
$config['s3']['region'] = 'oss-ap-southeast-1';  
$config['s3']['endpoint'] = 'http://bucket.oss-ap-southeast-1.aliyuncs.com';  
$config['s3']['key'] = 'xxx';  
$config['s3']['secret'] = 'xxx';  
$config['s3']['bucket'] = 'bucket';
```

# Backblaze B2

Backblaze <https://www.backblaze.com/> 1TB 5\$/月

B2 - 配置

- 注册Backblaze账号
- 创建Bucket
- 配置Bucket



配置 - 配置



{"cache-control": "max-age=604800"} 配置

