

AWS S3

2.0.0 部署AWS S3 minio 部署AWS S3

config.php

config.php S3

```
$config['s3']['region'] = 'us-east-1';
$config['s3']['endpoint'] = 'http://minio.xxx.com:9000';
$config['s3']['key'] = 'xxx';
$config['s3']['secret'] = 'xxx';
$config['s3']['bucket'] = 'xxx';
```

- region
- endpointS3 http://xxx.com:9000
- key:minio
- bucket



- / S3S3



本地Backblaze B2FTP腾讯COS七牛云S3

绑定域名https://v.bmp.ovh/

权重0

游客上传☐ 是☒ 否

开关☐

保存


S3“”S3



配置AWS S3



config.php \$config['s3']['bucket']

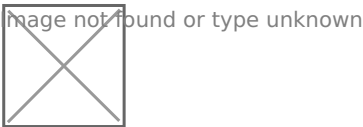


<https://developer.qiniu.com/kodo/4088/s3-access-domainname> “Endpoint”

- \$config['s3']['region'] cn-south-1
- \$config['s3']['endpoint'] Endpoint https / https://s3-cn-south-1.qiniucs.com


<https://portal.qiniu.com/user/key> AccessKey/SecretKey

- \$config['s3']['key'] AccessKey
- \$config['s3']['bucket']

ImgURL - / S3

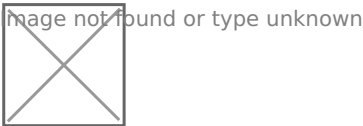

<https://oss.console.aliyun.com/bucket> - Bucket

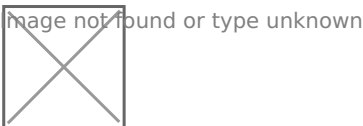

config.php S3

```
$config['s3']['region'] = 'us-east-1';  
$config['s3']['endpoint'] = 'http://minio.xxx.com:9000';  
$config['s3']['key'] = 'xxx';
```

```
$config['s3']['secret'] = 'xxx';  
$config['s3']['bucket'] = 'xxx';
```

配置OSS Region和Endpoint

- region 配置Region ID
- endpoint http://buket. Endpoint http://bucket.oss-cn-hangzhou.aliyuncs.com
- bucket 配置Bucket名称

配置AccessKey ID和AccessKey Secret

- key 配置AccessKey ID
- secret 配置AccessKey Secret

配置完成

```
$config['s3']['region'] = 'oss-ap-southeast-1';  
$config['s3']['endpoint'] = 'http://bucket.oss-ap-southeast-1.aliyuncs.com';  
$config['s3']['key'] = 'xxx';  
$config['s3']['secret'] = 'xxx';  
$config['s3']['bucket'] = 'bucket';
```

Backblaze B2

Backblaze <https://www.backblaze.com/> 1TB 5\$/月

B2 - 配置

- 注册Backblaze账号
- 创建Bucket
- 配置Bucket



配置 - 配置



{"cache-control": "max-age=604800"} 配置

#9

xiaoz 31 2022 07:39:28

xiaoz 17 2022 13:53:52