



Zdir 3

- [LinuxZdir](#)
- [DockerZdir](#)
- [WindowsZdir](#)
- [Zdir](#)
- [NginxZdir](#)

# Linux 安装 Zdir

安装前请关闭 Selinux



安装 Zdir 或 安装 Zdir 并安装依赖

```
# CentOS
yum -y install curl
curl -s "http://soft.xiaoz.org/zdir/sh/zdir.sh" | bash -s install

# Debian or Ubuntu
apt-get install curl
curl -s "http://soft.xiaoz.org/zdir/sh/zdir.sh" | bash -s install
```

- /data/apps/zdir
- /data/apps/zdir/data/public



Zdir <https://soft.xiaoz.org/#/public/zdir>

安装 SSH

```
# 安装 Zdir
mkdir zdir
#
cd zdir
#
wget https://soft.xiaoz.org/zdir/3.2.0/zdir_3.2.0_linux_amd64.tar.gz
#
tar -xvf zdir_3.2.0_linux_amd64.tar.gz
#
./zdir init
#
```

```
systemctl start zdir
# 
systemctl stop zdir
# 
systemctl restart zdir
# 
systemctl enable zdir
```

- data/public

6080

```
#firewalld
firewall-cmd --zone=public --add-port=6080/tcp --permanent
firewall-cmd --reload
#ufw
ufw allow 6080/tcp
```



http: //IP: 6080/#/user/login

image not found or type unknown






# Docker & Zdir

# Docker

XXXXXXXXXXXXDockerXXXXXXXXXXXXXXXXXXXX

```
docker run -d --name="zdir" \
-v /data/apps/zdir/data:/data/apps/zdir/data \
-v /data/public:/data/apps/zdir/data/public \
-p 6080:6080 \
--restart=always \
helloz/zdir:3.3.0
```

- `/data/apps/zdir/data` `/data/apps/zdir/data` 
- `/data/public`  `Zdir` 
- `6080`  `Zdi6080` 

# docker compose

☒ Zdi docker-compose. yamł


```
version: '3.3'

services:
  zdir:
    container_name: zdir
    volumes:
      - '/data/apps/zdir/data: /data/apps/zdir/data'
      - '/data/public: /data/apps/zdir/data/public'
    ports:
      - '6080:6080'
    restart: always
    image: 'helloz/zdir:3.3.0'
```

```
docker-compose up -d
```




Docker  zdir helloz/zdir"latest"




2


- 1.
- 2.



- 1.
- 2. 
  - /data/apps/zdir/data Zdir
  - /data/apps/zdir/data/public
- 3.



6800



http: //IP: 6080/#/user/login

Image not found or type unknown




# WindowsZdir


WindowsZdir

<http://soft.xiaoz.org/#/public/zdir>

zdir " " "




./zdir.exe init




" " "

Init success.

Win + Rservices.mscZdir



http: //IP: 6080/#/user/login





- 3.2.0 data/config/config.ini
- 3.1.x data/config.ini



1. data/config/config.ini
2. data/config/config.ini data/config.ini



```
# [servers]
[servers]
port = :6080
RunMode = release

# [storages]
[storages]
public_path = data/public
public_domain =

# [sites]
[sites]
title = Zdir
name = Zdir
```



# [servers]

- port Zdi: 6080
- RunMode Zdi release debug



□□□□[storages]

- `public_path` `data/public`
- `public_domain` `(http://localhost + /public)` `http://soft.xiaoz.org/public`

- title [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ]
- name [ ] [ ] [ ] [ ] Zdir [ ] [ ] [ ] [ ] [ ] [ ]

--	--	--	--

- Windows \ / D: \apps D: /apps
- ZdirZdir

# Nginx配置

## Nginx配置


配置Nginx的Zdir配置

```
server {  
    listen 80;  
    #domain.com  
    server_name domain.com;  
  
    # 配置  
    location = / {  
        proxy_pass http://127.0.0.1:6080;  
        proxy_set_header X-Real-IP $remote_addr;  
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;  
    }  
    # 配置, public  
    location ~* /(assets|public|api|admin) {  
        #Expires  
        if ( $uri ~* .*\. (gif|jpg|jpeg|png|bmp|webp|swf|flv|mp4|ts|ico|js|css|svg|ico)$ ) {  
            expires 7d;  
        }  
        client_max_body_size 1024m;  
        proxy_pass http://127.0.0.1:6080;  
        proxy_set_header X-Real-IP $remote_addr;  
        proxy_set_header Host $host;  
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;  
    }  
    # / assets/public/ , ,  
    location / {  
        rewrite ^/(.*) /public/$1;  
    }  
}
```


data/config/config.ini public\_domain http://domain.com http https

# Nginx

Nginx - -

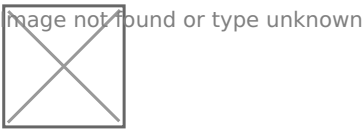

-

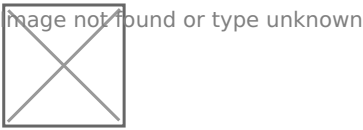

```
# =
location = / {
    proxy_pass http://127.0.0.1:6080;
    proxy_set_header X-Real-IP $remote_addr;
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
}
# Vue, public
location ~* /(assets|public|api|admin) {
    #Expires
    if ( $uri ~* .*\. (gif|jpg|jpeg|png|bmp|webp|swf|flv|mp4|ts|ico|js|css|svg|ico)$ ) {
        expires 7d;
    }
    proxy_pass http://127.0.0.1:6080;
    proxy_set_header X-Real-IP $remote_addr;
    proxy_set_header Host $host;
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
}
# / /assets/public/ , ,
location / {
    rewrite ^/(.*) /public/$1;
}
```



Image not found or type unknown